










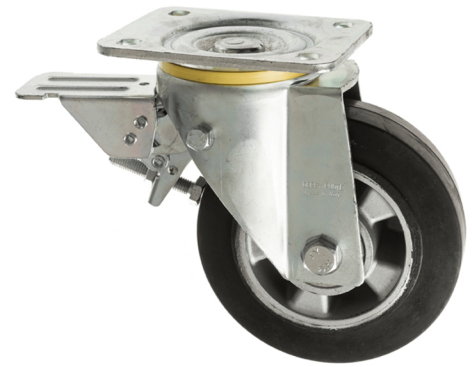











8" Heavy Duty Leading Brake Castors - 200mm Rubber Castor Wheel

200-5000-HRT/FR

Leading Brake Castors are ideal for applications where when moving equipment you do not want the foot operated brake pedal to be lost under the equipment. No following brake flutter, and foot pedal easily accessed. These Leading Brake added to our heavy duty 5000 Series castors for heavy duty applications.



Technical Specifications

	Bearing Type	Ball Journal
	Colour	No
	Hardness of Tread	75 shore A
	Load Capacity (kg)	500
	Max Load Capacity of 4 Castors	1500
	Plate Dimension Length (mm)	140
	Plate Dimension Width (mm)	110
	Plate Hole Centres Length (mm)	105
	Plate Hole Centres Width (mm)	80/75
	Plate Hole Diameter	10
	Product Type	Top Plate Castors
	Swivel Radius	180
	Temperature Range	-20 min to +85 max
	Thread Material	No
	Total Castor Height	240
	Tread Width (mm)	40
	Wheel Centre	Aluminum
	Wheel Colour	Black
	Wheel Diameter(mm)	200
	Wheel Material	Rubber

Dimensions

